Certificate Policy/ Certification Practice Statement



OIDs:	1.3.6.1.4.1.8024.0.1
	1.3.6.1.4.1.8024.0.3
Effective Date:	5 July, 2022
Version:	4.39

3.2.3. Authentication Of Individual Identity 15
3.2.4. Non-Verified Subscriber Information 18
3.2.5. Validation Of Authority 18
3.2.6. Criteria For Interoperation 18
3.3. Identification And Authentication For Re-Key Requests 18
3.3.1. Identification and Authentication For Routine Re-Key 18
3.3.2. Identification and Authentication For Re-Key After Revocation 18
3.4. Identification and Authentication For Revocation Requests 18
4. CERTIFICATE LIFE-CYCLE OPERATION REQUIREMENTS 19
4.1. Certificate Application 19
4.1.1. Who Can Submit A Certificate Application 19
4.1.2. Enrolment Process And Responsibilities 19
4.2. Certificate Application Processing 19
4.2.1. Performing Identification And Authentication Functions 19
4.2.2. Approval Or Rejection Of Certificate Applications 20
4.2.3. Time To Process Certificate Applications 20
4.3. Certificate Issuance 20
4.3.1. CA Actions During Certificate Issuance 20
4.3.2. Notification To Applicant Subscriber By The CA Of Issuance Of Certificate 21
4.3.3. Notification to NCA for PSD2 Certificates 21
4.4. Certificate Accepep tp f.....j0 Tc 0 Tw (.)2 Tm( )...jq0 Tc (.....)Tj(.....0 1 Tf0.006 Tc -0.006 Tw 9 -0 0 9 148.32 51

4.9.5. Time Within Which The CA Must Process The Revocation Request 27
4.9.6. Revocation Checking Requirement For Relying Parties 28
4.9.7. CRL Issuance Frequency 28
4.9.8. Maximum Latency For CRL 28
4.9.9. On-Line Revocation/Status Checking Availability 28
4.9.10. OCSP Checking Requirement 29
4.9.11. Other Forms Of Revocation Advertisements Available 29
4.9.12. Special Requirements in Relation to Key Compromise 29
4.9.13. Circumstances For Suspension 29
4.9.14. Who Can Request Suspension 29
4.9.15. Procedure For Suspension Request 29
4.9.16. Limits On Suspension Period 29
4.10. Certificate Status Services 30
4.10.1. Operational Characteristics 30
4.10.2. Service Availability 30
4.10.3. Optional Features 30
4.11. End Of Subscription 30
4.12. Key Escrow And Recovery 30
4.12.1. Key Escrow And Recovery Policy And Practices 30
4.12.2. Session Key Encapsulation And Recovery Policy And Practices 31
5. FACILITY, MANAGEMENT, AND OPERATIONAL CONTROLS 31
5.1. Physical Controls 31
5.1.1. Site Location and Construction 31
5.1.2. Physical Access 31
5.1.3. Power And Air-Conditioning 32
5.1.4. Water Exposures 32
5.1.5. Fire Prevention And Protection 32
5.1.6. Media Storage 32
5.1.7. Waste Disposal 32
5.1.8. Off-Site Backup 32
5.2. Procedural Controls 32
5.2.1. Trusted Roles 32
5.2.2. Number of Persons Required Per Task 33
5.2.3. Identification and Authentication For Each Role 33
5.2.4. Roles Requiring Separation of Duties 33
5.3. Personnel Controls 33
5.3.1. Qualifications, Experience And Clearance Requirements 34
5.3.2. Background Check Procedures 34
5.3.3. Training Requirements 34
5.3.4. Retraining Frequency And Requirements ..... 4.c -00 Td(3....4 -.....)T

5.5.3. Protection Of Archive.....37
5.5.4.

7.1.6. CP/CPS Object Identifier 49
7.1.7. Usage Of Policy Constraints Extension 49
7.1.8. Policy Qualifiers Syntax And Semantics 49
7.1.9. Processing Semantics For The Critical Certificate Policies Extension 50
7.2. CRL Profile 50
7.2.1. Version Number 52
7.2.2. CRL And CRL Entry Extensions 52
7.3. OCSP Profile 53
7.3.1. OCSP Version Numbers 53
7.3.2. OCSP Extensions 53
7.4. LDAP Profile 53
7.4.1. LDAP Version Numbers 53
7.4.2. LDAP Extensions 53
7.5. Certificate Fields and Root CA Certificate Hashes 54
7.5.1. Certificate Fields 54
7.5.2. QuoVadis Root Certificate Hashes 55
8. COMPLIANCE AUDIT AND OTHER ASSESSMENTS 55
8.1. Frequency, Circumstance And Standards Of Assess2 (e(D)-6.7 8i64-FS)0.7 (S)0.7 (MEN)-1 (T)4.4 (S)]TJ....08j(.....

This Certificate Policy/Certification Practice Statement (CP/CPS) sets out the certification processes that the QuoVadis PKI uses in the generation, issue, use, and management of Certificates and serves to notify Subscribers and Relying Parties of their roles and responsibilities concerning Certificates. This CP/CPS applies to the following Root CAs:

- QuoVadis Root CA 1 G3
- QuoVadis Root CA 3 / QuoVadis Root CA 3 G3

QuoVadis maintains accreditations and certifications of its PKI. These include:

- Qualified Trust Service Provider (QTSP) under Regulation (EU) No. 910/2014 (eIDAS). QuoVadis is listed on the EU Trusted List (EUTL) for the Netherlands and for Belgium;
- Trust Service Provider under PKIoverheid in the Netherlands;
- Qualified Certification Service Provider in Switzerland (ZertES);
- WebTrust for CAs and WebTrust SSL Baseline with Network Security;
- Accredited CA by the EU Policy Management Authority for Grid Authentication in e-Science (EUGridPMA). This entitles QuoVadis to issue Certificates meeting the guidelines of the International Grid Trust Federation (IGTF); and
- Authorised Certification Service Provider (Bermuda) entitled to issue Accredited Certificates under the requirements of the Electronic Transactions Act 1999.

Any person seeking to rely on Certificates or participate within the QuoVadis PKI must do so pursuant to definitive contractual documentation. Other important documents include both private and public documents, QuoVadis' agreements with its customers, Relying Party agreements, and QuoVadis' privacy policies. QuoVadis may provide additional certificate policies or certification practice statements. These supplemental policies and statements are available to applicable users or relying parties.

Pursuant to the IETF PKIX RFC 3647 framework, this CP/CPS is divided into nine parts that cover the security controls and practices and procedures for certificate and time-stamping services within the QuoVadis PKI. To preserve the outline specified by RFC 3647, section headings that do not apply are accompanied with the statement "Not applicable" or "No stipulation".

In addition, a *QuoVadis PKta[illegible]*

Certificate on a trusted system. Prior to verification of identity and issuance of a Certificate, a Subscriber is an *Applicant*. Within the QuoVadis Portal a Subscriber may also be referred to as *Certificate Holder*.

Subscribers are required to act in accordance with this CP/CPS and Subscriber Agreement. *See* also Section 9.6.3.

Relying Parties are entities that act in Reasonable Reliance on a Certificate and/or Digital Signature issued by QuoVadis. A Relying Party may, or may not, also be a Subscriber of the QuoVadis PKI. Relying parties must check the appropriate CRL or OCSP response prior to relying on information featured in a Certificate. The location of the Certificate Status service is detailed within the Certificate.

Relying Parties are required to act in accordance with this CP/CPS and the Relying Party Age requi 615.5 T3Td( )Tj/TT3(632.5

This CP/CPS and related agreements and security policy documents referenced within this document are administered by the QuoVadis Policy Management Authority (PMA).

Enquiries or other communications about this CP/CPS should be addressed to the QuoVadis PMA.

Policy Director
QuoVadis Limited
11 Bermudiana Road, Suite 1640
Hamilton HM-08, Bermuda

Website: https://www.quovadisglobal.com
Electronic mail: compliance@quovadisglobal.com
Customer complaints: qvcomplaints@digicert.com

QuoVadis provides additional information for entities requiring assistance with revocation or an investigative report at https://www.q50[illegible]

(PMA) means the QuoVadis body responsible for overseeing and approving CP/CPS amendments and general management.

means the key of a Key Pair that is kept secret by the holder of the Key Pair, and that is used to create digital signatures and/or to decrypt electronic records or files that were encrypted with the corresponding Public Key.

means the key of a Key Pair that may be publicly disclosed by the holder of the corresponding Private Key and that is used by a Relying Party to verify digital signatures created with the holder's corresponding Private Key and/or to encrypt messages so that they can be decrypted only with the holder's corresponding Private Key.

A Certificate whose primary purpose is to identify a person with a high level of assurance, where the Certificate meets the qualification requirements defined by the applicable legal framework of the eIDAS Regulation.

means a Certificate for Electronic Signatures, that is issued by a QTSP and meets the requirements laid down in Annex I of the eIDAS Regulation.

means a Certificate issued to a Legal Person (company) by a QTSP and is used to secure authenticity, integrity and confidentiality in electronic communication of messages and documents.

means an Advanced Electronic Signature that is created by a QSCD and which is based on a Qualified Certificate for Electronic Signatures.

(QSCD) means an Electronic Signature/seal creation device that meets the requirements laid down in Annex II of the eIDAS.

(QTSP) means a trust service provider which is granted Qualified status by the relevant Supervisory Authority of an EU country under the eIDAS Regulation. A Qualified TSP's Approved Qualified services are shown on an EU Trusted List.

means a RA designated by an Issuing CA to operate within the QuoVadis PKI responsible for identification and authentication of Subscribers.

means a Certificate that meets the requirements of Article 7 of ZertES (see Section 8.1.1).

means an Advanced Electronic Signature which has been created using a secure signature creation unit as referred to in Article 6 of ZertES and is based on a Regulated Certificate issued to a natural person and valid at the time the Electronic Signature is generated.

means an Individual or Organisation that has entered into a Relying Party Agreement authorising that person or Organisation to exercise Reasonable Reliance on Certificates, subject to the terms and conditions set forth in the applicable Relying Party Agreement.

means a Holder of a
mean01 Tw -2-7 (a)-8 (l)--12 (t)- a neo Q6.94bn Pleot to thms ficate



The Identification and Authentication procedures used by QuoVadis depend on the Class of Certificate being issued (*See* Appendix A and Appendix B). Issuing CAs may delegate the responsibility to one or more RAs.

All Subscribers require a distinguished name that complies with the ITU X.500 standard for Distinguished Names (DN). The QuoVadis PMA approves naming conventions for the creation of distinguished names for Issuing CA applicants. Different naming conventions may be used by different Issuing CAs.

The Subject name of all Certificates issued to Individuals shall be the authenticated common name of the Subscriber. Names consisting of multiple words are permitted. Subjects MAY chose name order in accordance with national preference.

Each User must have a unique and readily identifiable Subject DN. Alternatively, DNs may be based on domain name components, e.g. CN=John Smith, DC=QuoVadis, DC=BM. The Common Name may contain the applicant's first and last name (surname).

For Certificates issued under the Baseline Requirements, the use of Internal Server Names and Reserved IP Addresses is prohibited, and the FQDN or authenticated domain name is placed in the Common Name (CN) attribute of the Subject field and/or the Subject Alternative Name extension.

The Distinguished Names of a Code Signing Certificate must identify the legal entity that intends to have control over the use of the Private Key when signing code.

QuoVadis uses Distinguished Names that identify both the entity (i.e. person, organisation, device, or object) that is the subject of the Certificate and the entity that is the issuer of the Certificate. QuoVadis only allows directory information trees that accurately reflect organisation structures.

Unless otherwise specifically stated in this CP/

iv) BR Section 3.2.2.5.3

ii) Date and place of birth, or reference to at least one nationally recognised identity document, or other attributes which may be used to, as far as possible, distinguish the person from others with the same name.

If the Subject is a natural person identified in association with an organisational entity (legal person), additional evidence shall be provided of:

i) Full name and legal status of the associated organisational entity;

ii)

Entities that can perform this verification include the CA, RA, or third-party validators approved by QuoVadis.

-

Prior to issuing TLS Certificates, QuoVadis checks for CAA records for each dNSName in the subjectAltName extension of the Certificate to be issued. If the QuoVadis Certificate is issued, it will be issued within the TTL of the CAA record, or 8 hours, whichever is greater.

When processing CAA records, QuoVadis processes the issue, issuewild, and iodef property tags as specified in RFC 8659. QuoVadis may not act on the contents of the iodef property tag. QuoVadis will not issue a Certificate if an unrecognised property is found with the critical flag.

CAA checking is optional for Certificates issued by a Technically Constrained Issuing CA as set out in Baseline Requirements Section 7.1.5, or where CAA was checked prior to the creation of a corresponding CT pre-certificate that was logged in at least 2 public CT log servers.

DNS access failure can be treated as permission to issue when the failure is proven to be outside QuoVadis infrastructure, was retried at least once, and the domain zone does not have a DNSSEC validation chain to the ICANN root.

QuoVadis documents potential issuances that were prevented by a CAA record, and may not dispatch reports of such issuance requests to the contact stipulated in the CAA iodef record(s), if present. QuoVadis supports mailto: and https: URL schemes in the iodef record.

The identifying CAA domains recognised by QuoVadis: are “digicert.com”, “digicert.ne.jp”, "cybertrust.ne.jp", “symantec.com”, “thawte.com”, “geotrust.com”, “quovadisglobal.com”, “rapidssl.com”, “digitalcertvalidation.com” and any domain containing those identifying domains as suffixes (e.g. example.digicert.com) or registered country jurisdictions (e.g., digicert.de).

After receiving a Certificate Application, QuoVadis or an RA verifies the application information and other information in accordance with this CP/CPS.

If an RA (including an Enterprise RA) assists in the verification, the RA must create and maintain records sufficient to establish that it has performed its required verification tasks and communicate the completion of such performance to QuoVadis. After verification is complete, QuoVadis evaluates the corpus of information and decides whether or not to issue the Certificate.

QuoVadis, in its sole discretion, may refuse to issue a Certificate, without incurring any liability for loss or damages arising out of such refusal. QuoVadis reserves the right not to disclose reasons for such a refusal. Rejected Applicants may re-apply. Subscribers are required to check the Certificate’s contents for accuracy prior to using the Certificate.

protected from unauthorised modification. After issuance is complete, the Certificate is stored in a database and sent to the Subscriber.

A Relying Party should use discretion when relying on a Certificate and should consider the totality of the circumstances and risk of loss prior to relying on a Certificate. If the circumstances indicate that additional assurances are required, the Relying Party must obtain such assurances before using the Certificate. Any warranties provided by QuoVadis are only valid if a Relying Party's reliance was reasonable and if the Relying Party adhered to the Relying Party Agreement set forth in the QuoVadis Repository.

A Relying Party should rely on a Digital Signature or TLS handshake only if:

i) the Digital Signature or TLS session was created during the operational period of a valid Certificate and can be verified by referencing a valid Certificate,

ii) the Certificate is not revoked and the Relying Party checked the revocation status of the Certificate prior to the Certificate's use by referring to the relevant CRLs or OCSP responses, and

iii) the Certificate is being used for its intended purpose and in accordance with this CP/CPS.

QuoVadis modifies Certificates at the request of certain Certificate Subjects or in its own discretion. QuoVadis does not make certificate modification services available to all Subscribers.

After receiving a request for modification, QuoVadis verifies any information that will change in the modified Certificate. QuoVadis will only issue the modified Certificate after completing the verification process on all modified information. RAs are required to perform Identification and Authentication of all modified Subscriber information in accordance with the requirements of the applicable Certificate Profile.

QuoVadis may deliver the Certificate in any secure fashion, such as using a QuoVadis Portal.

Conduct constituting acceptance of a modified Certificate is in accordance with Section 4.4.1. Modified Certificates are considered accepted 30 days after the Certificate is modified, or earlier upon use of the Certificate when evidence exists that the Subscriber used the Certificate.

QuoVadis publishes modified Certificates by are conicy -0.0y are conicy -023 (- (y)-15.14.7) 3.3 (e)-14.7 edT

In the absence of exceptional circumstances confirmed with the relevant Supervisory Authority, QuoVadis will revoke a Certificate within 24 hours when QuoVadis becomes aware that a QSCD used for QCP-n-qscd or QCP-l-qscd loses its certification status.

QuoVadis may revoke a Certificate within 24 hours and will revoke a Certificate within 5 days after receipt and confirming that one or more of the following occurred:

i) QuoVadis obtains evidence that the Certificate was misused and/or used outside the intended purpose as indicated by the relevant agreement;

ii) The Subscriber breached a material obligation under the CP/CPS or the relevant agreement

iii) QuoVadis

vi) The Subscriber was added as a denied party or prohibited person to a blocklist or is operating from a destination prohibited under the laws of the United States;

vii) For Adobe Signing Certificates, Adobe has requested revocation; or

viii) For code-signing Certificates, the Certificate was used to sign, publish, or distribute malware, code that is downloaded without user consent, or other harmful content.

ix) QuoVadis receives notice or otherwise becomes aware that there has been some other modification

QuoVadis provides Anti-Malware Organisations, Subscribers, Relying Parties, Application Software Vendors, and other third parties (such as a National Competent Authority that issued the Authorisation Number in a PSD2 Certificate) with clear instructions on how they can report suspected Private Key compromise, Certificate misuse, Certificates used to sign Suspect Code, Takei(s)-4.7 02 (n)2.8 (s (sTe(w)21(K)1)2.7w)21(K)1d P aioateteu K

Datacentres have primary and secondary power supplies that ensure continuous and uninterrupted access to electric power. Uninterrupted power supplies (UPS) and generators provide redundant backup power.

The cabinets housing QuoVadis' CA and TSA systems are designed to prevent and protect against water exposure.

QuoVadis datacentres are equipped with fire suppression mechanisms.

The System Administrator/System Engineer installs and configures system hardware, including servers, routers, firewalls, and network configurations. The System Administrator/System Engineer also keeps critical systems updated with software patches and other maintenance needed for system stability and recoverability.

Internal Auditors are responsible for reviewing, maintaining, and archiving audit logs and performing or overseeing internal compliance audits to determine if QuoVadis, an Issuing CA, or RA is operating in accordance with this CP/CPS or approved registration procedures.

RA Administrators manage the RA certificate management systems.

The Security Officer is mio8g1(r)-8.7 10.8(l)-.2 (P) f O-2.2 o8g19g aud8Tu f toy Og aThilPh8 Og b(t)6.6wo.3 (i)torw 6.922, (c)-5.

The PMA is responsible and accountable for QuoVadis PKI operations and ensures compliance with this CP/CPS. Prior to the engagement of any person in the Certificate management process, QuoVadis verifies the identity and trustworthiness of such person. QuoVadis determines that all individuals assigned to trusted roles perform their prospective job responsibilities competently and satisfactorily as required.

Without limitation, QuoVadis shall not be liable for employee conduct that is outside of their duties and for which QuoVadis has no control including, without limitation, acts of espionage, sabotage, criminal conduct, or malicious interference.

QuoVadis verifies the identity of each employee appointed to a trugoTT1i(i)6r1 Tc5e[(a618.9 (t)-5.4 (y)4 (o)6.9 (f)001 Tc 0.61

QuoVadis employees and agents failing to comply with this CP/CPS, whether through negligence or malicious intent, are subject to internally maintained processes specifying guidance on administrative or disciplinary actions, up to and including termination of employment or agency and criminal sanctions.

Independent contractors who are assigned to perform trusted roles are subject to the duties and
(a)-7 9 (je)-7 (2.7 (e)-6(n)1 (t)-i7 (n)2.8 (-5.699 -1.181)-3.3 (b)3.9 (je)6 (s)]TJ0 T/(a)-7 (s)-4.7 (s)-4.8 (ig)-f9.96 -8 (d)6.8 M (s

- Entries to and exits from the CA facility.

QuoVadis event logs include:

- Date and time of the record;
- Identity of the entity making the journal record; and
- Details of the of record.

If QuoVadis needs to transfer any media to a different archive site or equipment, QuoVadis will maintain both archived locations and/or pieces of equipment until the transfer are complete. All transfers to new archives will occur in a secure manner.

QuoVadis maintains and implements backup procedures so that in the event of the loss or destruction of the primary archives a complete set of backup copies is readily available.

QuoVadis supports time stamping of its records. All events that are recorded within the QuoVadis service include the date and time of when the event took place. This date and time are based on the system time on which the CA system is operating. QuoVadis uses procedures to review and ensure that all systems operate correctly.

If QuoVadis suspects that one of its CA Private Keys has been compromised, the PMA will convene a response team to assess the incident and take appropriate action. QuoVadis will meet the requirements of Section 1.1 by following incident response plans whose steps generally include the following:

i) Collect information related to the incident;

ii) Determine the degree and scope of compromise; and report on the course of action that should be taken to correct the problem and prevent reoccurrence;

iii) If appropriate, contact government agencies, law enforcement, and other interested parties and activate any other appropriate additional security measures; and

iv) Incorporate lessons learned into the implementation of long term solutions and the Incident Response Plan.

QuoVadis may generate a new Key Pair and sign a new Certificate. If a disaster physically damages QuoVadis'

to a regulatory body and the continuation of revocation status in the event of termination. QuoVadis also has formally documented complaint and dispute resolution procedures.

QuoVadis has made arrangements to cover the costs associated with fulfilling these requirements in case QuoVadis becomes bankrupt or is unable to cover the costs. Any requirements of this Section that are varied by contract apply only the contracting parties.

QuoVadis CA Key Pairs are generated by multiple trusted individuals acting in trusted roles and using a cryptographic hardware device as part of scripted key generation ceremony in the environments described in Section 5.1 ani81 b5.7 (tion9o8 (g)-8 (g)-8 (e)-7 (d i)-12.2 (n)2.3 ((i)6.9 (c)-5.[(c)-5.88 (r)3.d8 (a)-7 (n)2.[(c)-5.2 (e)-7wd i0)-8.

In the case of natural persons, the Subscribers' Private Key is maintained and used under their sole control and used only for Electronic Signatures. In the case of legal persons, the Private Key is maintained and used under their control and used only for Electronic Seals.

Subscribers generate Key Pairs and deliver Public Keys to the Issuing CA in a secure and trustworthy manner, such as submitting a CSR message to a QuoVadis Portal.

QuoVadis' Public Keys are provided to Relying Parties as specified in a certificate validation or path discovery policy file, as trust anchors in commercial browsers and operating system root stores, and/or as roots signed by other CAs. All Accreditation Authorities supporting QuoVadis Certificates and all Application Software Vendors are permitted to redistribute QuoVadis CA Certificates.

QuoVadis may also distribute Public Keys that are part of an updated signature Key Pair as a self-signed Certificate, as a new CA Certiln > uta katb-9 ( )es andis

Private Keys corresponding to QuoVadis Root Certificates are not used to sign Certificates except in the following cases:

i) Self-signed Certificates to represent the QuoVadis Root CAs;

ii) Certificates for subordinate Issuing CAs and Cross Certificates;

iii) Certificates for infrastructure purposes (administrative role certificates, internal CA operational device certificates); and

iv) Certificates for OCSP Response verification.

Subscriber Certificates assert key usages based on the intended application of the Key Pair and cannot include anyExtendedKeyUsage. Key usage bits and extended key usages are specified in Appendix A and Appendix B.

An Issuing CA's Private Keys may be used for Certificate signing and CRL and OCSP response signing and shall not be used for any other purpose.

All Participants in the QuoVadis PKI are required to take all appropriate and adequate steps to protect their Private Keys in accordance with the requirements of this QuoVadis CP/CPS. Without limitation to the generality of the foregoing, all Participants in the QuoVadis PKI must (i) secure their Private Key and take all reasonable and necessary precautions to prevent the loss, damage, disclosure, modification, or unauthorised use of their Private Key (to include password, Token or other activation data used to control access to the Private Key); and (ii) exercise sole and complete control and use of the Private Key that corresponds to their Public Key.

The generation and maintenance of the Root and Issuing CA Private Keys are facilitated through the use of HMS. The HSM used by Issuing CAs in the QuoVadis PKI are designed to provide at least FIPS 140-2 Level 3 and/or Common Criteria EAL 4 security standards in both the generation and the maintenance in all Root and Issuing CA Private Keys.

For Qualified Certificates of type QCP-n-qscd, the Subscriber Private Keys are generated and stored on a QSCD.

For relevant EU Qualified Certificates of type QCP-n-qscd or QCP-l-

using cloud-based generation and protection solution as defined in Section 16.3.1 of the Code Signing Baseline Requirements; or

using signing service as defined in Section 16.2 of the Code Signing Baseline Requirements.

QuoVadis' authentication mechanisms are protected securely when not in use and may only be accessed by actions of multiple trusted persons. Backups of CA Private Keys are securely stored and require two-person access. Re-activation of a backed-

be kept in encrypted form only and secured. At a minimum, Subscribers are required to authenticate themselves to the cryptographic module before activating their Private Keys.

For TLS Certificates, the subjectAltName extension is populated in accordance with RFC 5280 with the authenticated value in the Common Name field of the subject DN (domain name or public iPAddress). The SubjectAltName extension may contain additional authenticated domain names or public iPAddresses.

For internationalized domain names, the Common Name is represented as a puny-code value and that Common Name will be represented in the Subject Alternative Name extension as a puny-coded A-label value. These different encodings of the same name are treated as equal values for the purposes of Common Name to Subject Alternative Name duplication requirements.

QuoVadis' Technically Constrained Subordinate CA Certificates include an Extended Key Usage (EKU)

No stipulation.

If present, this extension cannot be marked critical. This extension must be present for a Root CA or Issuing CA Certificate, including Cross Certificates. This extension may be present for Certificates not technically capable of causing issuance, subject to the requirement that the CRLReason cannot be certificateHold (6).

If a reasonCode CRL entry extension is present, the CRLReason must indicate the most appropriate reason for revocation of the certificate. QuoVadis may use the following reasonCode values from RFC 5280. When the CRLReason is not one of the following, then the reasonCode extension will not be provided:

- keyCompromise (1)
- affiliationChanged (3)
- (superseded (4)) or
- (cessationOfOperation (5)) or
- (certificateHold (6)).

The CRLReason superseded is intended to be used to indicate when:

the

The QuoVadis OCSP Responders conform to version 1, as defined by RFC 6960. If an OCSP response is for a Root CA or Issuing CA, including Cross Certificates, and that Certificate has been revoked, the revocationReason field within the RevokedInfo of the CertStatus is present and asserted.

OCSP Responder Certificates have a maximum validity of 12 months.

The singleExtensions of an OCSP response cannot contain the reasonCode (OID 2.5.29.21) CRL entry extension.

QuoVadis hosts a Repository in the form of a Lightweight Directory Access Protocol (LDAP) directory for the purpose of (i) storing and making available all X.509 v3 Certificates issued under the QuoVadis PKI, (ii) facilitating public access to download these Certificates for Subscriber and Relying Party requirements, and (iii) receiving (from the QuoVadis PKI), storing and making publicly available, regularly updated CRL v2 information, for the purpose of Certificate validation.

LDvaailab -0 0 3 (eg)3240 0 126.2 (5.002 T

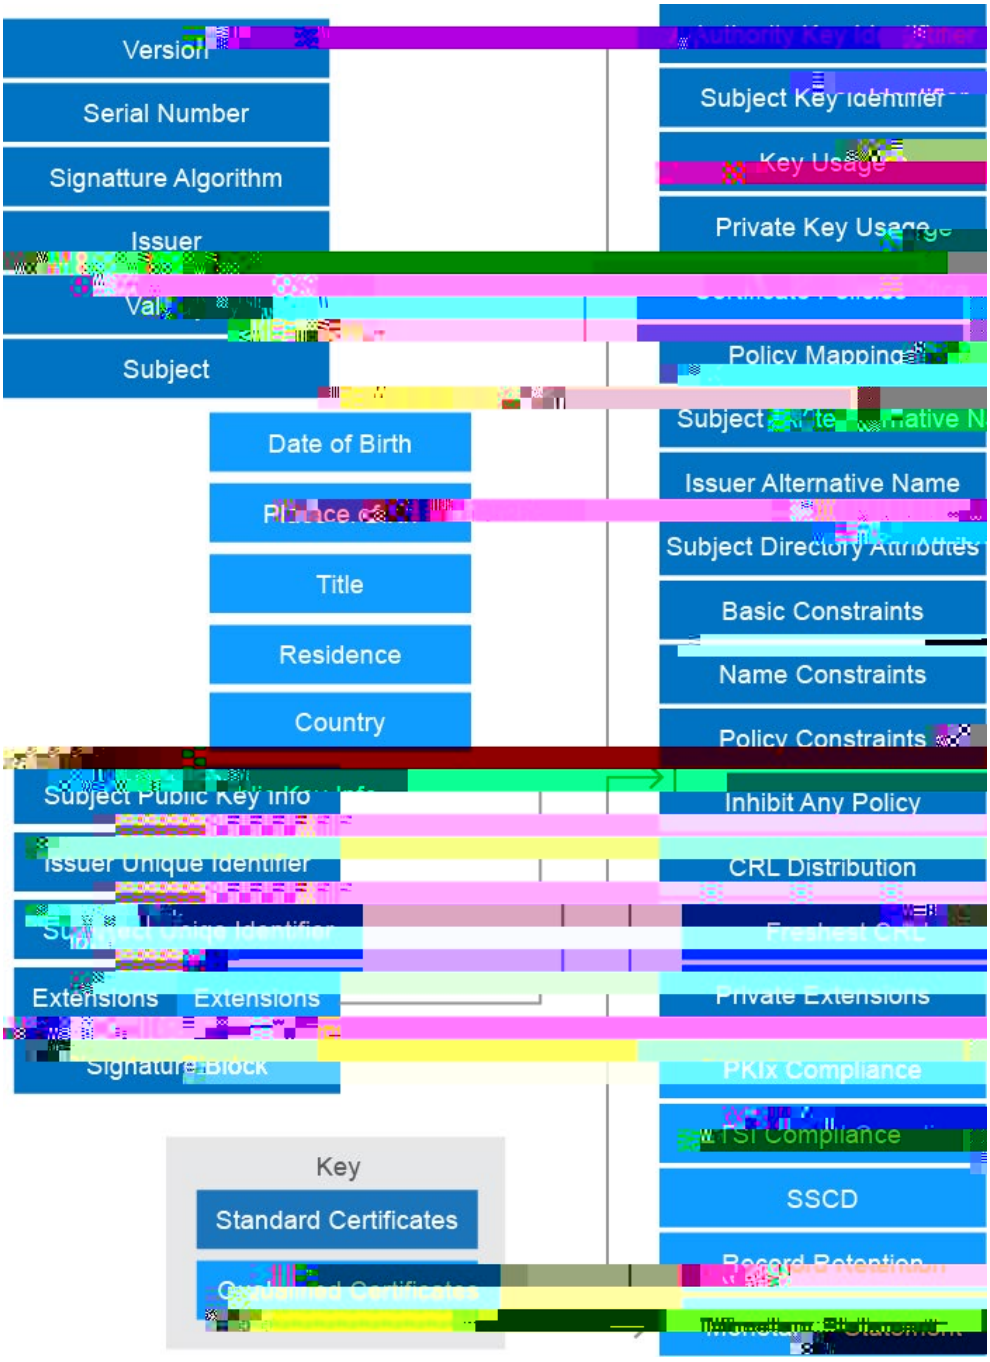
Version
Serial Number
Signatture Algorithm
Issuer
Subject
Date of Dimension
Title
Residence
Country
Subject Public Key Info
Extensions
Extensions
Signature Block
Subject Key Identifier
Key Usage
Private Key Usage
Policy Mapping
Issuer Alternative Name
Subject Directory Attributes
Basic Constraints
Name Constraints
Policy Constraints
Inhibit Any Policy
CRL Distribution
Private Extensions
PKIx Compliance
SSCD
Key
Standard Certificates

Note that all QuoVadis CA Certificates and CRLs are available for download from the QuoVadis Repository at https://www.quovadisglobal.com/repository.

Serial Number	78 58 5f 2e ad 2c 19 4b e3 37 07 35 34 13 28 b5 96 d4 65 93
Signature Block	Signature matches Public Key Root Certificate: Subject matches Issuer Key Id Hash (sha1): 92 ae ef 0e 89 02 ee 6d 79 68 d1 a1 0e 75 60 01 fa e4 eb fc Subject Key Id (precomputed): a3 97 d6 f3 5e a2 10 e1 ab 45 9f 3c 17 64 3c ee 01 70 9c cc Cert Hash(sha1): 1b 8e ea 57 96 29 1a c9 39 ea b8 0a 81 1a 73 73 c0 93 79 67

Serial Number	05c6
Signature Block	Signature matches Public Key Root Certificate: Subject matches Issuer Key Id Hash(sha1): 14 8d b3 54 ed 9b 2f 13 08 7c c3 8b 4b c1 5b 96 8a c5 53 78 Subject Key Id (precomputed): f2 c0 13 e0 82 43 3e fb ee 2f 67 32 96 35 5c db b8 cb 02 d0

WebTrust auditors must meet the requirements of Section 8.2 of the CA/Browser Forum Baseline Requirements. ETSI Conformance Assessment Bodies must meet the requirements of the relevant national accrediting authority. Auditors shall be experienced in performing information security audits, specifically having significant experience with PKI and cryptographic technologies.

i[0.4 (tC 32 (ie.8 b6C)6. law)8.9 (,)6 02.lh2 (pe

QuoVadis charges fees for verification, certifirua2 1.8 (3V)0.4 (g)6ngt igi(t)wveoVadi5

QuoVadis follows the Privacy Notices posted on its website when handling personal information. *See* https://www.quovadisglobal.com/privacy-policy which also includes privacy information for Remote Identity Verification. Personal information is only disclosed when the disclosure is required by law or when requested by the subject of the personal information. Such privacy policies shall conform to applicable local privacy laws and regulations including the Council Directive 95/46/EC of the European Parliament and of the Council of 24 October 1995 and the Swiss Federal Act on Data Protection of June 19, 1992 (SR 235.1).

QuoVadis treats all personal information about an individual that is not publicly available in the contents of a Certificate or CRL as private information. QuoVadis protects private information using appropriate safeguards and a reasonable degree of care.

Subject to local laws, private information does not include CP/CPS and other Repository documents, Certificates, CRLs, or their contents.

QuoVadis employees and contractors are expected to handle personal information in strict confidence and meet the requirements of US and European law concerning the protection of personal data. QuoVadis will not divulge any private

v)

the Relying Party has, at the time of that reliance, acted in good faith and in a manner appropriate to all the circumstances known, or circumstances that ought reasonably to have been known, to the Relying Party;

the Relying Party has, at the time of that reliance, verified the Digital Signature, if any;

the Relying Party has, at the time of that reliance, verified that the Digital Signature, if any, was created during the Operational Term of the Certificate being relied upon;

HEREOF WILL NOT EXCEED THE AMOUNTS PAID BY OR ON BEHALF OF SUBSCRIBER TO QUOVADIS IN THE

This CP/CPS as amended from time to time

i) Arbitration: In the event a dispute is allowed or required to be resolved through arbitration, the parties will maintain the confidential nature of the existence, content, or results of any arbitration hereunder, except as may be necessary to prepare for or conduct the arbitration hearing on the merits, or except as may be necessary in connection with a court application for a preliminary remedy, a judicial confirmation or challenge to an arbitration award or its enforcement, or unless otherwise required by law or judicial decision.

ii) Class Action and Jury Trial Waiver: THE PARTIES EXPRESSLY WAIVE THEIR RESPECTIVE RIGHTS TO A JURY TRIAL FOR THE PURPOSES OF LITIGATING DISPUTES HEREUNDER. Each party agrees that any dispute must be brought in the respective party's individual capacity, and not as a plaintiff or (a)-6.97i9ewTc -0.009 .97i9ewTc -0.0.8 (t)4.7 (i)4.8 a ji6j09 Tw -39. (l)-7.1 5-11.9 (t)6..8 (tif)(H)3.-0.001 ep ut4.9 (( )

If any provision of this CP/CPS is held invalid or unenforceable by a

Different QuoVadis Certificate Profiles may be issued with different key usages, and be eligible for optional Key Escrow, according to the following table:

Standard Certificates provide flexibility for a range of uses appropriate to their reliance value including S/MIME, electronic signatures, authentication, and encryption.		
Validation procedures for QuoVadis Standard Certificates collect either direct evidence or an attestation from an appropriate and authorised source of the identity (such as name and organisational affiliation) and other specific attributes of the Subject. Subjects may include an Individual (natural person); an Organisation (legal person); or a natural person, device, or system identified in association with an Organisation. Identity proofing may be conducted via enterprise records, physical presence; Remote Identity Verification (RIV1-4), reliance on electronic signature, or video verification.		
Subject	/CN (mandatory) (GN+SN or Pseudonym) /GN (mandatory if CN without Pseudonym) /SN (mandatory if CN without Pseudonym) Pseudonym (optional for natural person) /O (optional) /OU (optional) /organizationalIdentifier (optional) /serialNumber (optional) /E (optional) /L (optional) /ST (optional) /C (mandatory)	See definitions in Section 7.1.1. Variable
SAN	/E 1.3.6.1.4.1.311.20.2.3 UPN	Variable
Certificate Policies	1.3.6.1.4.1.8024.1.100 QV Standard Certificate 0.4.0.2042.1.3 ETSI LCP OID (optional)	Fixed
Key Usage (Critical)	digitalSignature (optional) nonRepudiation keyEncipherment (optional) keyAgreement (optional)	Variable
Extended Key Usage	clientAuth emailProtection documentSigning smartcardLogon enrolmentAgent	Variable (at least one is present)

QV Advanced Certificates provide reliable verification of the Subject's identity and may be used for a broad range of applications including Digital Signatures, encryption, and authentication.
Validation procedures for QV Advanced Certificates are based on the Normalised Certificate Policy (NCP) described in ETSI EN 319 411-1. Subjects may include an Individual (natural person); an Organisation (legal person); or a natural person, device, or system identified in association with an Organisation. *See* Section 3.2.2 and 3.2.3. Identity proofing may be conducted via physical presence, Remote Identity Verification (RIV4 for NFC with RIV2 as a fallback option if NFC is not available), or reliance on electronic signature.NF1(o)3.7243 (g)]TJ0 Tc 0 TTf9.96N 9.9dwD (g)]459(o)6 9 (n)9e o

QuoVadis

1.2.840.113583.1.1.9.2 Adobe Archive RevInfo

Subject	/CN (mandatory)	

Subjects may include an Individual (natural person) or a natural person identified in association with an Organisation. Only methods approved for eIDAS Qualified Certificates may be used.

Subject	/CN (mandatory) = Natural Person (/GN+/SN or Pseudonym) /GN (mandatory if CN without Pseudonym) /SN (mandatory if CN without Pseudonym) Pseudonym (optional	

id-etsi-qcs-QcPDS (0.4.0.1862.1.5) id-etsi-qcs-5	URL= https://www.quovadisglobal.com/repository Language = EN	Fixed
id-qcs-pkixQCSyntax-v2 (1.3.6.1.5.5.7.11.2)	0.4.0.194121.1.1 (id-etsi-qcs-semanticsId-Natural) (optional semantics identifier OID that is included in QuoVadis Certificates)	Fixed
id-etsi-qcs-QcCompliance (0.4.0.1862.1.1) id-etsi-qcs-1	esi4-qcStatement-1: Claim that the certificate is an EU Qualified Certificate in accordance with Regulation EU No 910/2014	Fixed

The purpose of thes7 (l)-7N(s)-4.7 (7 ()-7 (of)0.>BDC q77.88 520.32 489.96 Tw 34 6.2 (e)]TJETQq77.88 332.4 489

• iii) account information (PSP_AI) OID: id-psd2-role-psp-ai { 0.4.0.19495.1.3 } • iv) issuing of card-based payment instruments (PSP_IC) OID: id-psd2-role-psp-ic { 0.4.0.19495.1.4 } These Certificates require a QSCD that meets the requirements laid down in Annex II of the eIDAS Regulation. The Subscriber's obligations (or respectively the obligations on the TSP managing the key on their behalf) require that the Private Key is maintained (or respectively is used) under the Subject's sole control.		
Subject	/CN (mandatory) =/0 /O (optional) /OU (optional) organizationalIdentifier (optional) /serialNumber (optional) /E (optional) /L (optional) /ST (optional) /C (mandatory) If serialNumber is present then it must be structured per Section 5.1.3 of ETSI EN 319 412-1: • 3 character identity type reference (e.g. PAS or IDC); • 2 character ISO 3166 country code; • hyphen-minus "-" (0x2D (ASCII), U+002D (UTF-8)); and • identifier. For PSD2: • “PSD" as 3 character legal person identity type reference; • 2 character ISO 3166 [7] country code representing the NCA country; • hyphen-minus "-" (0x2D (ASCII), U+002D (UTF-8)); and • 2-8 character NCA identifier (A-Z uppercase only, no separator) • hyphen-minus "-" (0x2D (ASCII), U+002D (UTF-8)); and • PSP identifier (authorisation number as specified by the NCA).	See definitions in Section 7.1.1 Variable
SAN	/E	Optional
Certificate Policies	1.3.6.1.4.1.8024.1.400 QV Qualified – QSCD or 1.3.6.1.4.1.8024.1.410 QV Qualified QSCD – on behalf of 0.4.0.194112.1.3 (QCP-l-qscd) URL: https://www.quovadisglobal.com/repository	Fixed

Adobe Acrobat Trust List	1.2.840.113583.1.1.9.1 Adobe Time-stamp (link to TSA) 1.2.840.113583.1.1.9.2 Adobe Archive RevInfo (long term validation)	Optional
Key Usage (Critical)	Nonrepudiation digitalSignature (optional)	Variable
Extended Key Usage	clientAuth (optional) emailProtection (optional) documentSigning (optional)	Variable (at least one is present)
id-etsi-qcs-QcCompliance (0.4.0.1862.1.1) id-etsi-qcs-1 id-etsi-qcs	esi4-qcStatement-1: Claim that the certificate is an EU Qualified Certificate in accordance with Regulation EU No 910/2014	Fixed

- 2 character ISO 3166 [7] country code representing the NCA country;
- hyphen-minl Tm(1 0 T.446 0 TdN Tm(1 0 T.4ox [57.38-0.001 Tc -0002 Tw 0.337 0

Certificate Policies	1.3.6.1.4.1.8024.1.400 QV Qualified – QSCD or 1.3.6.1.4.1.8024.1.410 QV Qualified QSCD – on behalf of 0.4.0.194112.1.2 (QCP-n-qcsd) URL: https://www.quovadisglobal.com/repository

This Section provides an overview of the requirements and Certificate contents for Grid Certificates issued in accordance with the requirements of the International Grid Trust Federation (IGTF) or one of its member bodies.

All Grid End User Certificates and Grid Server Certificates issued must comply with the Grid Certificate Profile as defined by the Open Grid Forum GFD.125.

All Grid Certificates will be issued to Applicants based on cryptographic data generated by the Applicant, or based on cryptographic data tha

	/ST (optional) /C (mandatory)	
Domain Components (DC)	DC=com, DC=quovadisglobal, DC=grid, DC=<organisation identifier>, DC=hosts	Holder Variable
SAN	SAN dNSName with the Fully Qualified Domain Name or an iPAddress	Variable
Certificate Policies	1.3.6.1.4.1.8024.0.1.10.0.0 QV Grid 1.2.840.113612.5.2.2.1 IGTF Classic Authentication Profile 2.23.140.1.2.2 CABF OV	Fixed
Key Usage (Critical)	digitalSignature keyEncipherment dataEncipherment	Fixed
Extended Key Usage	clientAuth serverAuth	Fixed

	If the codeSigning EKU is present: = 2.23.140.1.2.3 If the timeStamping EKU is present, operated by QuoVadis: 1.3.6.1.4.1.8024.0.2000.6	
Certificate Transparency	(1.3.6.1.4.1.11129.2.4.4) If the serverAuth EKU is present, this field MAY include two or more Certificate Transparency proofs from approved CT Logs.	Optional

Validity Period	

iii) the ccTLD of the requested Domain Name;

iv) information provided by the Domain Name Registrar; or

v) a method identified in “Identity” above.

During the Certificate approval process, QuoVadis Validation Specialists employ controls to validate the identity of the Applicant and other information featured in the Certificate Application to ensure compliance with this CP/CPS.

Step 1: The Applicant provides a signed Certificate Application to QuoVadis, which includes identifying information to assist QuoVadis in processing the request and issuing the Business SSL Certificate, along with a PKCS#10 CSR and billing details.

Step 2: QuoVadis independently verifies information using a variety of sources.

Step 3: The Applicant accepts the Subscriber Agreement and approves Certificate issuance. Step 4: All signatures are verified through follow-up procedures or telephone calls.

Step 5: QuoVadis obtains and documents further explanation or clarification as necessary to resolve discrepancies or details requiring further explanation. If satisfactory explanation and/or additional documentation are not received within a reasonable time, QuoVadis will decline the Certificate Request and notify the Applicant accordingly. Two QuoVadis Validation Specialists must approve issuance of the Certificate.

Step 6: QuoVadis creates the Business SSL Certificate.

Step 7: The Business SSL Certificate is delivered to the Applicant.

Renewal 1.6L01 Tpt(ed)6.ewa

The primary purpose of QuoVadis Code Signing Certificates is to establish that executable code originates from a source identified by QuoVadis. QuoVadis Certificates focus only on the identity of the Subject named in the Certificate, and not on the behaviour of the Subject. As such, Certificates are not intended to provide any assurances, or otherwise represent or warrant:

- That the Subject named in the Certificate is actively engaged in doing business;
- That the Subject named in the Certificate complies with applicable laws;
- That the Subject named in the Certificate is trustworthy, honest, or reputable in its business dealings; or
- That it is “safe” to do business with the Subject named in the Certificate.

Eligible Applicants include Individual Applicants and Organisational Applicants.